

FIG 5

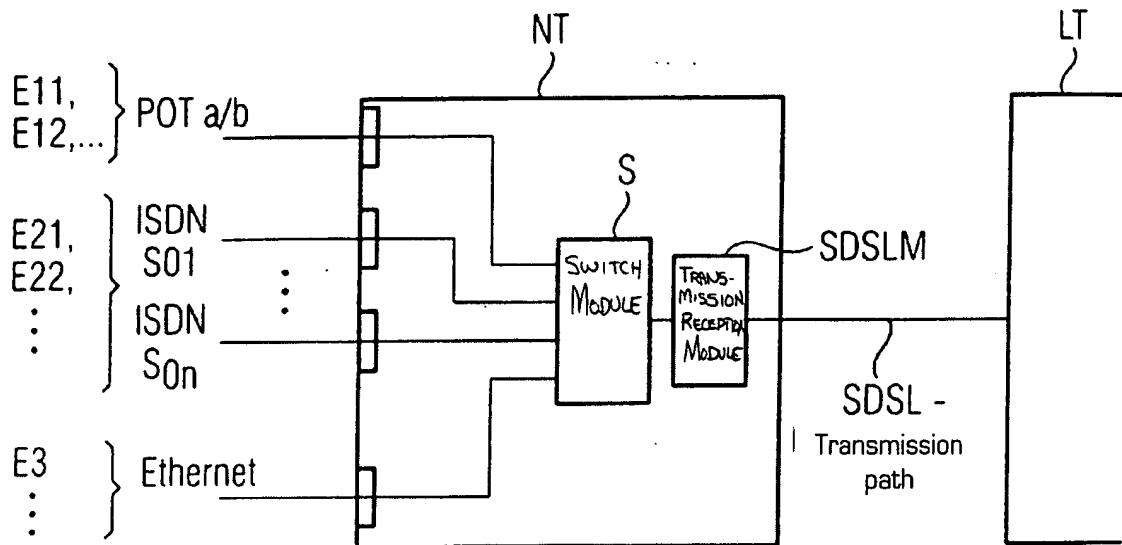


FIG 7

Eoc -Message- encoding:	Message Byte 1	Message Byte 2
Service -ID (e.g. ISDN)	Service -No. (for example, selection of an ISDN connection)	Signalling for operational purposes

FIG 6

